



FENCES AND GATES **CATALOG**



TABLE OF CONTENTS	PAGE
ABOUT DEMEX.....	3
DIPLOMAS & CERTIFICATES.....	4
NET SYSTEM.....	5-9
PANEL SYSTEM.....	10-16
WROUGHT IRON FENCE.....	17-19
SLIDING GATE.....	20-23
SWING GATE.....	24-26
BI-FOLDING GATE.....	27
ROTATION GATE.....	28
VERTICAL GATE.....	29
AUTOMATIC ROAD BARRIER.....	30-36
MANUAL ROAD BARRIER.....	37-38
VERTICAL ROAD BARRIER.....	39

Peace of mind by day... Peace of mind by night

Demex offers comprehensive area protection solutions and security products. We generate profitability for our customers through a wide product range, high delivery reliability and personal service.



About Us

We are a leading Northern European provider of fencing solutions with a 25% share of Swedish material market.



Mission

Our mission is to give our customers peace of mind by helping them protect their property and those they care about.



Vision

To become the security provider that house, company and institutional owners prefer for protecting their property and those they care about through the development of quality products that are affordable and make life comfortable.



Manufacturing/Wholesale

We offer gates, fencing and automation systems.



Distribution

As a global company we have a unique supply base, and we can offer fast deliveries at attractive prices all over the world.



Development

We are not afraid of new ideas. That is why we design, test, and improve functionality of our products using the latest technologies.



Support

We focus on comprehensive support to our customers. Quality products, repair agreement, and full support of our technicians ensure that our products will serve you for many years.



Global Network



We cooperate with foreign companies in the same industry. We are part of Uniaccess and Unifence.



DIPLOMAS & CERTIFICATES



Highest creditworthiness
2013

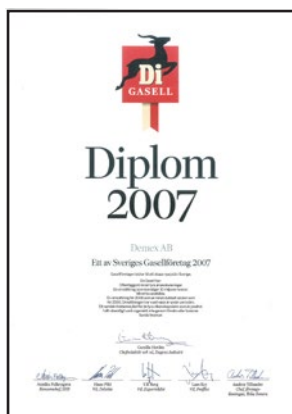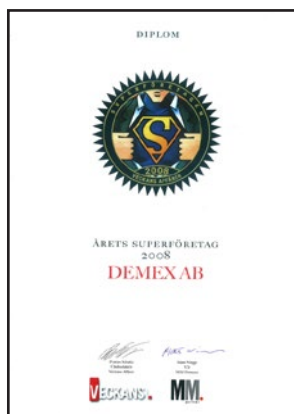

ADVANTAGES



SUPPORT



PLUG 'N PLAY PRODUCTS



FAST DELIVERY





NET SYSTEM DE-FENCE

The De-Fence chain-link fence is a common fence in Scandinavia. It is most often used to protect industrial properties, but also features in a number of other applications. It consists of galvanised or plastic-coated wire mesh fencing net and robust fencing posts of square steel in a number of different heights, from 0.5 m to 5 m! There are three different types of fencing posts that are installed in concrete foundation: corner posts, middle posts and end posts.

De-Fence Net

Made of hard single twisted steel wire.

The net has a checked pattern.

Edges are rounded on both sides.

Type 50.3.7: one side rounded, the other one with barbs. Roll length: 25 m.

Steel ultimate tensile strength: 320 of 510 N/mm² according to EN 10326.

De-Fence Posts

The posts are supplemented with plastic covers.

For vegetation, the distance between the posts and the size of the posts must be adapted to the situation.


A number of different heights and colours

The steel wires are galvanised and then coated with plastic. Posts are galvanised internally and externally (min. coating of 275g/m², both sides together) according to EN 10326. Then they are given an adhesive coating and finally a plastic coating (min. 60 microns).



PRODUCT ADVANTAGES

"Economical but durable fencing system".

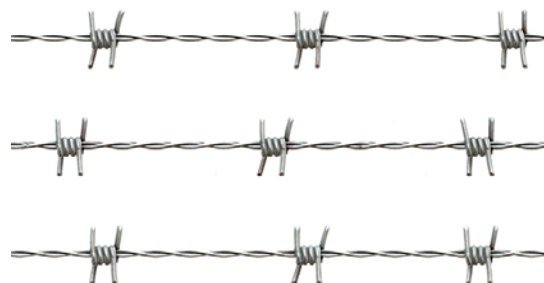


Barbed Wire

DEMEX SKYDDSKLASS 2 






Fencing Net



Fencing Posts

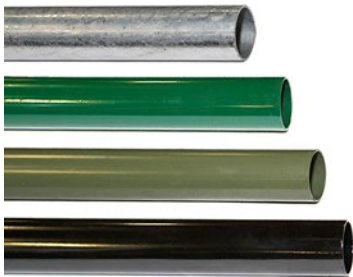

Bracing Tubes




Mounting Brackets



Stay Wire



Barbed Wire

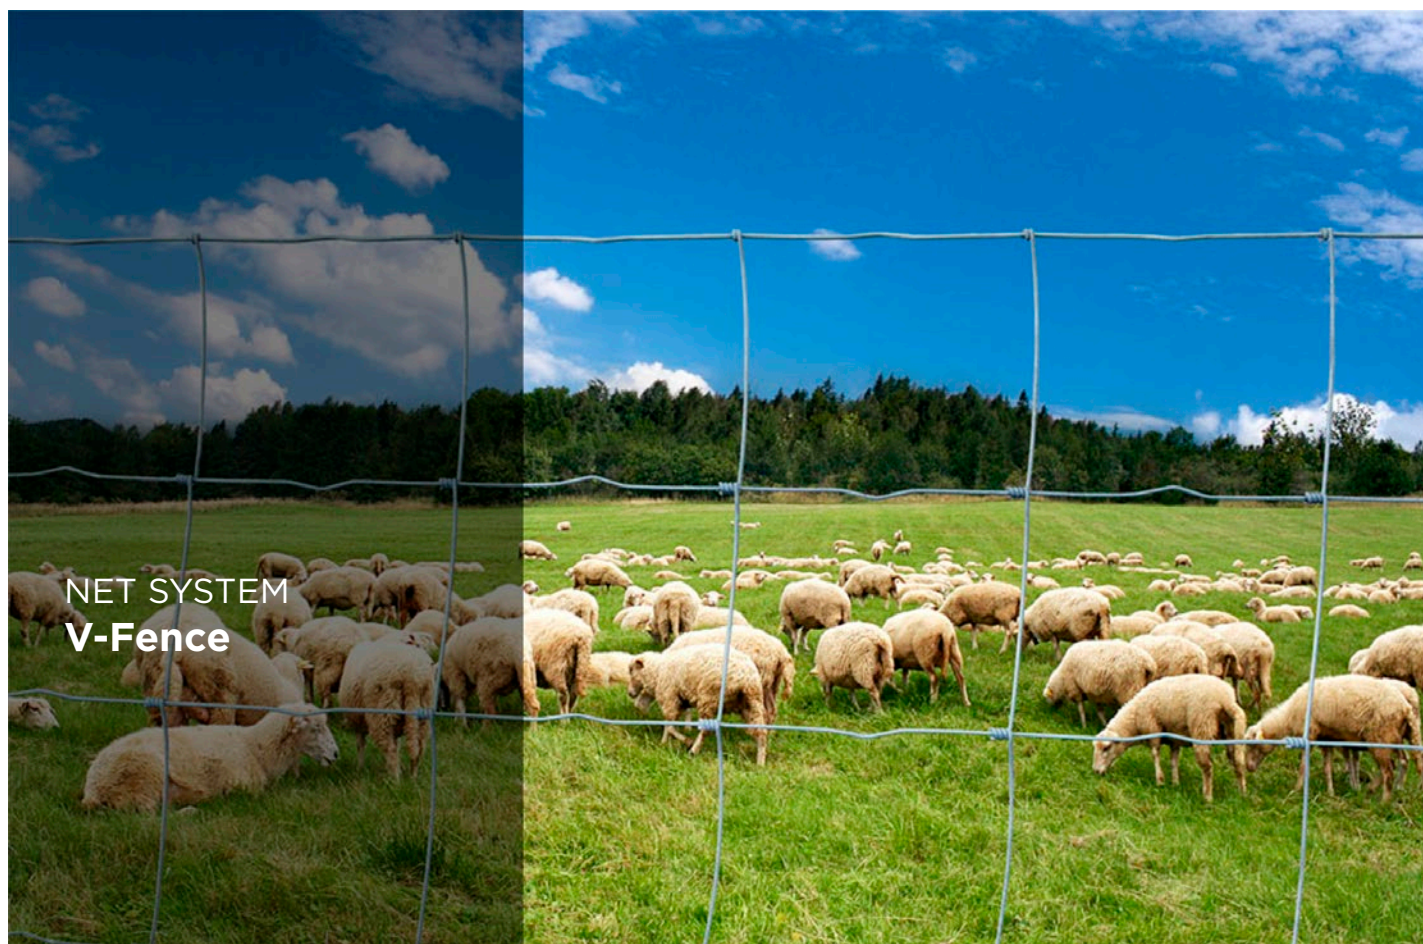

Effective enclosure of wild animals requires robust materials as unlike domestic animals, many wild animal species are used to roaming large areas and therefore have a natural tendency to force obstacles in the landscape. The V-Fence fencing system is excellent at protecting your property and our road network. The V-Fence fencing system is available in heights from 600 to 2,000 mm.

Strong and secure

Thanks to its design and its strong fencing posts, the V-Fence forms strong and secure fencing that protects effectively not only our roads, but also wild and domestic animals. V-Fence is the obvious choice for many property owners, municipalities and fitters.


It consists of a net of wires in a checked pattern with a twist knot or ring lock net system and robust fence posts made of wood or steel.

Keeps its shape and elasticity

V-Fence has strong core wires that enable it to maintain its shape. This results in a user-friendly setup. Elasticity is maintained through an advanced ring lock and twist knot system.

Net

Made of hard twisted steel wire with twist knots or ring locks.
The net has a checked pattern.
Length per roll: 50 m

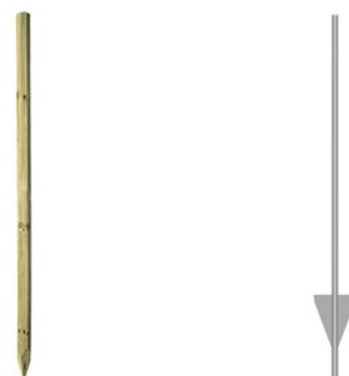

Wooden or winged posts

DEMEX SKYDDSKLASS 1 



V-Fence fast element



PRODUCT ADVANTAGES

"Effective enclosure of wild animals".






Properties

Name	Height (cm)	Lenght (m)	Weight (kg)	Roll/palette
100-8-15	102	50	20.0	20
120-14-15	123	50	30.3	16
150-13-15	151	50	30.9	20
200-22-15	197	50	47.3	16

Net

- Upper and lower wire Ø 2,40mm
- Horizontal wire Ø 1,90mm
- Vertikal wire Ø 1,90mm


200-22-1 5



150-13-1 5

120-14-1 5

100-8-1 5

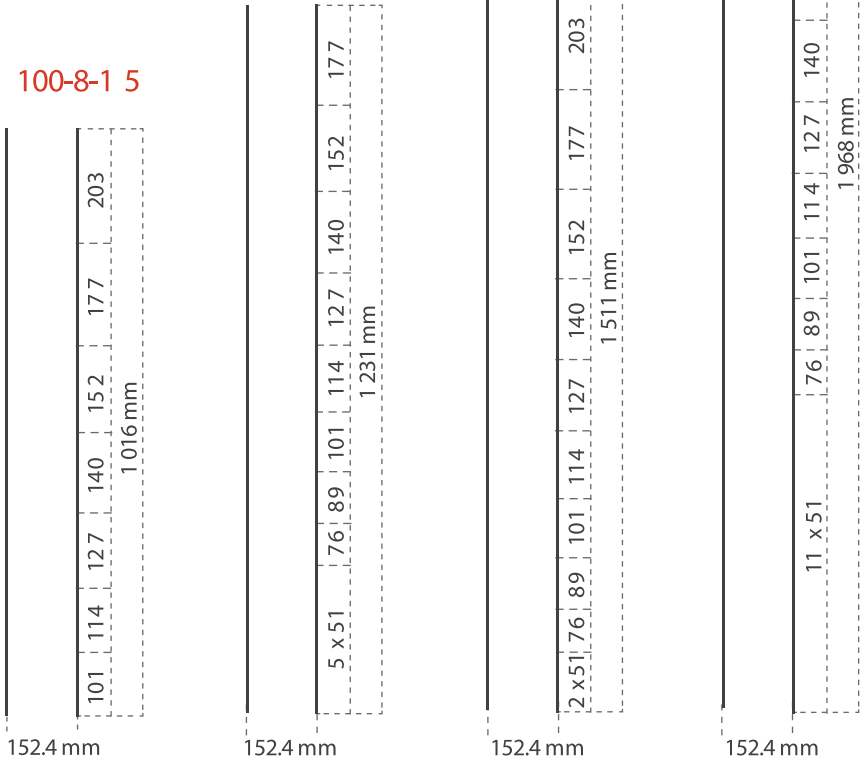

SNOW FENCE SNOWY

So, winter's train chaos stopped? New Swedish technology against snow. Snowy Snow Fence™ protects the roads and jobs and increases safety at ski resorts.

- Limit drifting snow
- Reduces wind speed
- Gathers the snow in a wide snowdrift around the snow fence
- Produced in Polyethylene for withstanding exceptionally cold temperatures down to -40°C.
- Simple and effective!

The solution against drifting snow

Demex's snow fence is the perfect solution for stopping drifting snow: Setting up the fence provides simple protection against harsh weather in the form of snow and wind. Extremely practical for house owners, farmers, as well as at exposed road stretches. A wonderful quality investment in times of lots of snow and wind.

Installation instructions

To achieve best results, place the net approx. 20 m from the area that needs protection against snow and snowdrift formation. The fence should be supported by steel or wooden posts (or the like) and fastened right above ground level (10 to 20 cm). This creates additional favourable turbulence in the direction of the wind. We recommend placement of the posts in a zigzag pattern at a distance of approx. 2 metres from each other in accordance with the image above.


Technical information

Demex's snow fence is manufactured in the environmentally friendly material PE (polyethylene) and is UV-stabilised. This ensures that the net will not break down or become corroded or brittle when exposed to sunlight and extreme temperatures.





PRODUCT ADVANTAGES

"Limit drifting snow. Simple and effective".

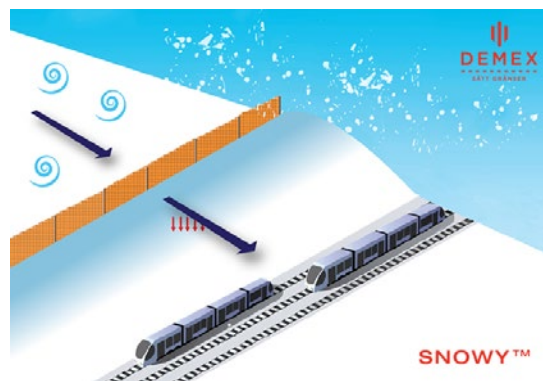

DEMEX SKYDDSKLASS 1 



Orange or green



Strong, secure and aesthetically pleasing

Portugal Guard is a fencing system that keeps its shape and gives a professional impression. It consists of a panel of vertical and horizontal sections and is available with a straight bow-shaped top and with or without a tip.

Portugal Guard Panels


- Vertical sections: 30x20 mm square sections
- Horizontal sections: 50x30 mm square sections
- Mesh size: 100 mm
- Panel length: 3,000 mm
- Panel height: 500 to 2,400 mm (additional heights on request).

A number of different heights and colours

Thanks to the simple design of the Portugal Guard fencing system, it can be delivered in practically all heights.

Portugal Guard is available in all colours (always hot-dip galvanised as pre-treatment). The most common of these are:

- Panels: Galvanised (FZV), Dark Green (RAL 6009), Olive Green (RAL 6013), Black (RAL 9005)
- Posts: Galvanised (FZV), Dark Green (RAL 6009), Olive Green (RAL 6013), Black (RAL 9005).

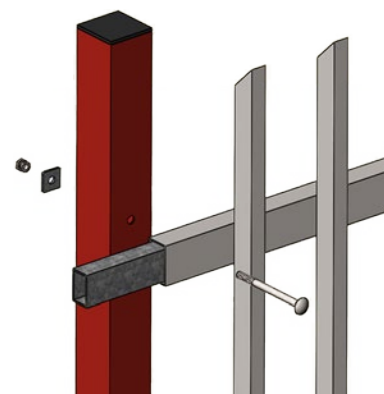

Easy installation

DEMEX SKYDDSKLASS 3 



PRODUCT ADVANTAGES

"Professional look and easy installation".





PANEL SYSTEM VIKING GUARD

Strong, secure and aesthetically pleasing

Viking Guard is a fencing system that keeps its shape and gives a professional impression. The vertically and horizontally running grating bars are spot-welded to each other in cross bonds.

Viking Guard Panels

- Vertical wire: \varnothing 6 mm
- Horizontal wire: \varnothing 8 mm (double)
- Mesh size: 50/200 or 100/200mm
- Panel length: 2,510mm
- Panel height: 630 to 2,430 mm (additional heights on request).

Viking Guard Fencing Posts

- Viking Speed posts
- Viking Alfa posts
- Viking Beta posts.

Keeps its shape and is easy to install

Viking Guard has strong wires which are bent and welded to each other in cross bonds that help the fencing preserve its shape. This results in a user-friendly setup.

3 mounting methods



Alfa

Beta

Speed

DEMEX SKYDDSKLASS 3 



PRODUKT FINESS

"Strong, safe system with several smart mounting methods".





PANEL SYSTEM VIKING SAFE

Strong, secure and aesthetically pleasing

Viking Safe is a fencing system that keeps its shape and gives a professional impression. The vertically and horizontally running grating bars are spot-welded to each other in cross bonds.

Viking Safe Paneler

- Vertical wire: \varnothing 6 mm
- Horizontal wire: \varnothing 8 mm (double t)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2,510 mm
- Panel height: 630 to 2,430 mm (additional heights on request).

Viking Safe fencing posts

- Viking Safe Speed posts
- Viking Safe Alfa posts
- Viking Safe Beta posts.

Keeps its shape and is easy to install

Viking Safe has strong wires which are bent and welded to each other in cross bonds that help the fencing preserve its shape. This results in a user-friendly setup.

3 mounting methods



Alfa

Beta

Speed

DEMEX SKYDDSKLASS 3 



PRODUCT ADVANTAGES

"Easy installation, long-lasting, and affordable system".



**ALFA****BETA****SPEEDFIXING****SIGMA****ALFA**

The Alfa System consists of 60x40 posts which are pre-drilled for attachment to the Viking Alfa Panel System to make installation simpler and faster. The Viking Alfa Posts are customised for panels which are joined with the fencing post and which, thanks to the design of the Viking Alfa Post and its mounting brackets, thereby create a stronger fencing system.

BETA

The Beta System consists of 60x40 posts which are pre-drilled for attachment to the Viking Beta Panel System to make installation simpler and faster. The Viking Beta Posts allow you to join the panels continuously with a Beta splicer that enables flexible distance between the fencing posts and makes the system faster and more economical to install.

SPEEDFIXING

The Speedfixing system has a specially developed post cover that allows you to hang panels on the fencing post and then attach them with Speedfixing brackets. This saves time during installation.

SIGMA

Viking Sigma Fence posts complements Viking Guard and Viking Safe Panel System. Panels in the sigma system hung on the mounting bracket.

**Alfa Fitting 60x40**

Article nr. A5197

**Beta joint plate 8/6/8**

Article nr. A6109

**Lock to 60x40 black**

Article nr. 3266

**Lock to 60x60 black**


Article nr. 3264

**U-fitting to 60x40 Speed Fixing**

Article nr. A3265

**U-fitting to 60x60 Speed Fixing**

Article nr. A3268

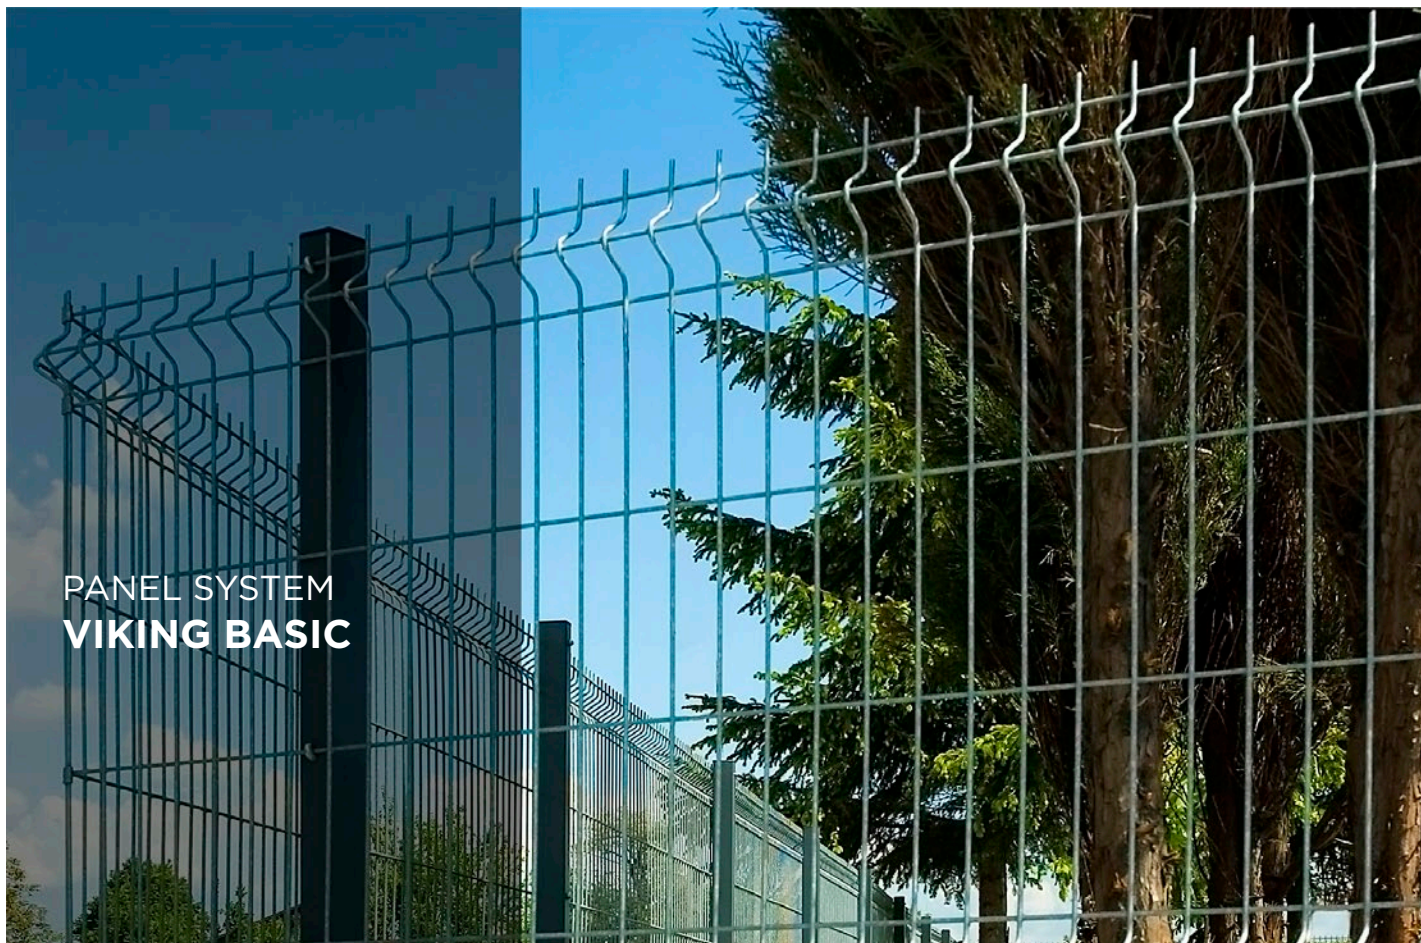

PANEL SYSTEM VIKING BASIC

Strong, secure and aesthetically pleasing

Viking Safe is a fencing system that keeps its shape and gives a professional impression. The vertically and horizontally running grating bars are spot-welded to each other in cross bonds.

Viking Basic panels

- Vertical wire: \varnothing 5 mm
- Horizontal wire: \varnothing 6 mm (double)
- Mesh size: 50/200 or 100/200mm
- Panel length: 2,510mm
- Panel height: 630 to 2,430 mm (additional heights on request).

Viking Basic fencing posts

- Viking Speed posts
- Viking Alfa posts
- Viking Beta posts

Keeps its shape and is easy to install

Viking Basic has strong wires which are bent and welded to each other in cross bonds that help the fencing preserve its shape. This results in a user-friendly set-up.

3 mounting methods



Alfa

Beta

Speed


DEMEX SKYDDSKLASS 3 



PRODUCT ADVANTAGES

"Strong system, lovely design. 3 meter wide panels".

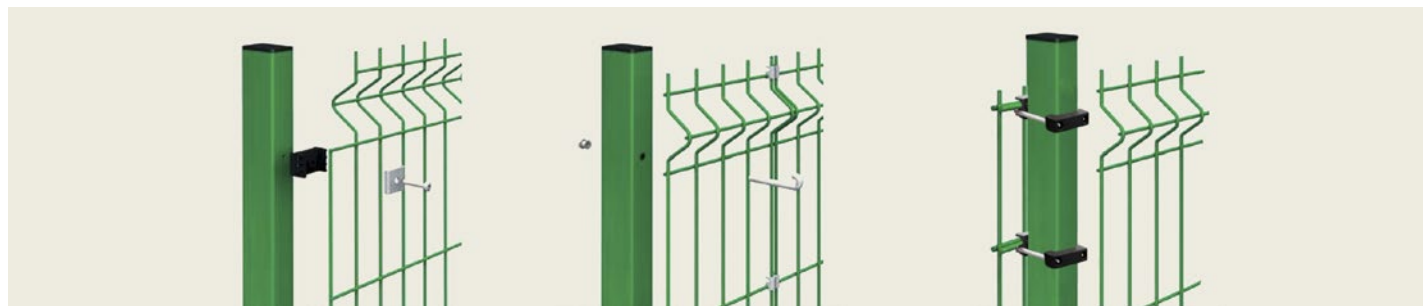

**ALFA****BETA****SPEEDFIXING****ALFA**

The Alfa System consists of 60x40 posts which are pre-drilled for attachment to the Viking Alfa Panel System to make installation simpler and faster. The Viking Alfa Posts are customised for panels which are joined with the fencing post and which, thanks to the design of the Viking Alfa Post and its mounting brackets, thereby create a stronger fencing system.

BETA

The Beta System consists of 60x40 posts which are pre-drilled for attachment to the Viking Beta Panel System to make installation simpler and faster. The Viking Beta Posts allow you to join the panels continuously with a Beta splicer that enables flexible distance between the fencing posts and makes the system faster and more economical to install.

SPEEDFIXING

The Speedfixing system has a specially developed post cover that allows you to hang panels on the fencing post and then attach them with Speedfixing brackets. This saves time during installation.

**Alfa Fitting 60x40**

Article nr. A5197

**Beta joint plate**

Article nr A5200

**Lock to 60x40 black**

Article nr. 3266

**Lock to 60x60 black**

Article nr. 3264

**U-fitting to 60x40 Speed Fixing**

Article nr. A3265

**U-fitting to 60x60 Speed Fixing**

Article nr. A3268



PANELSYSTEM NCBS

Strong, secure and aesthetically pleasing

The non-conductive fencing system is a fencing system that keeps its shape and gives a professional impression. Since the system is not made of metal, the weight per square metre is much lower than steel, but nevertheless, it is almost just as strong. Typical NCBS panels can withstand shock loads of more than 900 kg.

Non-Conductive Panels


- Panel thickness: 13 mm or 25 mm
- Mesh size: 60x60 or 45x45 mm
- Panel length: 3,700 mm
- Panel height: 900 mm or 1,200 mm.

Keeps its shape and is easy to install

Non-conductive fencing panels are made of strong composite material that helps the fencing keeps its shape. This results in a user-friendly setup.


Long service life

The non-conductive fencing system is produced of composite material and is therefore maintenance-free, is not subject to corrosion and is resistant to ultra-violet radiation.

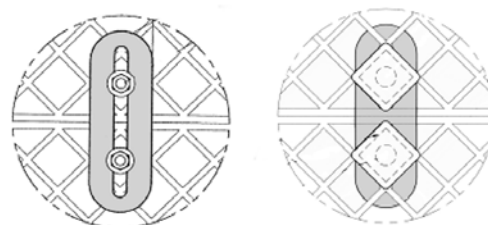

Installation of panels

DEMEX SKYDDSKLASS 3 

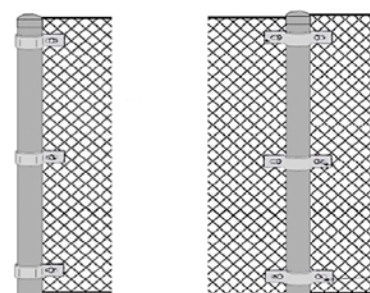

Installation of posts



PRODUCT ADVANTAGES

"Robust but light systems. All of the non-conductive materials: poles, panels and fittings".





WROUGHT IRON FENCE DIAMOND

Ornate design and sophisticated form


This type of fence raises prestige. It is an excellent alternative to the fence surrounding exclusive villas and residences, historic buildings, churches, government buildings and offices.

Strong construction

Demex Diamond Residential Fence system consists of specially designed panels, posts and fasteners that creates an aesthetically pleasing and powerful fence.

A number of different heights and colours

Diamond residential fence is available in different heights and all RAL colours.

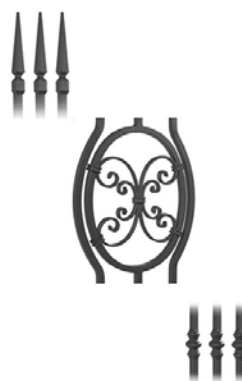

Details

DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

"Stylish fencing systems. The panels can be ordered separately without posts".





Modern and trendy design

An original design, which gives an unique, individual character. A wide range of colors and customized sizes.

Strong construction

Demex Gold Residential Fence system consists of specially designed panels, posts and fasteners that creates an aesthetically pleasing and powerful fence.

A number of different heights and colours

Gold residential fence is available in different heights and all RAL colours.



Details

DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

"Stylish fencing systems. The panels can be ordered separately without posts."





WROUGHT IRON FENCE SAFIR

Classic design and many different options available

This model of residential fence fits to simple shapes and modern buildings.

Strong construction

Demex Gold Residential Fence system consists of specially designed panels, posts and fasteners that creates an aesthetically pleasing and powerful fence.

A number of different heights and colours

Gold residential fence is available in different heights and all RAL colours.



Details

DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

“Economically and stylish modern fencing. The panels can be ordered separately without posts”.





SLIDING GATE HÖKEN

The Höken (Hawk) cantilever sliding gate is Svalan's big brother, securely controlling openings that are up to 8 m wide as a single leaf gate or up to 16 m wide as a double leaf gate. The gate employs the same market leading technology that makes the Demex cantilever sliding gates Scandinavia's best sliding gates according to our customers.

Problem-free operation

- Available both manually operated and automatically operated
- Designed and manufactured to open and close easily thanks to the EASYROLL wheel system.

Strong structure and aesthetically pleasing appearance

- Steel frame structure of 100x100 square sections with 25x25 square sections as standard filling
- Fillings of Viking Guard or Viking Basic panels available to match the fencing system that is used
- The sliding gates can be manufactured with tailored filling that matches the customer's choice
- All sliding gates are GALV FE hot-dip galvanised by default
- The sliding gates can be Z-LACK powder-coated in standard colours such as Olive Green (RAL 6005), Dark Green (RAL 6009), and Black (RAL 9005)
- The sliding gates can be Z-LACK powder-coated in all other RAL colours.



Easyroll wheel system

DEMEX SKYDDSKLASS 2 



PRODUCT ADVANTAGES

"Powerful and easy to install. Easyroll wheel system".





The Svalan (Swallow) industrial cantilever sliding gates are the best-selling sliding gates by Demex, securely controlling openings that are up to 7 m wide as a single leaf gate or up to 14 m wide as a double leaf gate. The gate employs the same market leading technology that makes the Demex cantilever sliding gates Scandinavia's best sliding gates according to our customers.

Problem-free operation

- Available both manually operated and automatically operated
- Designed and manufactured to open and close easily thanks to the EASYROLL wheel system.

Strong structure and aesthetically pleasing appearance

- Steel frame structure of 60x60 square sections with 25x25 square sections as standard filling
- Fillings of Viking Guard or Viking Basic panels available to match the fencing system that is used
- The sliding gates can be manufactured with tailored filling that matches the customer's choice
- All sliding gates are GALV FE hot-dip galvanised by default
- The sliding gates can be Z-LACK powder-coated in standard colours such as Olive Green (RAL 6005), Dark Green (RAL 6009), and Black (RAL 9005)
- The sliding gates can be Z-LACK powder-coated in all other RAL colours.

EASY Access

- Sign an EASY support agreement to ensure fail-free operation in the years to come
- Sliding gates can be opened or closed by any method whatsoever – using a mobile, remote control, key switch, code lock, or any other operating system.



PRODUCT ADVANTAGES


"Unique and easy to install. Available in manual, prepared for the automatic, and automatic version. Meets the insurance requirements".



Easyroll wheel system

DEMEX SKYDDSKLASS 2 



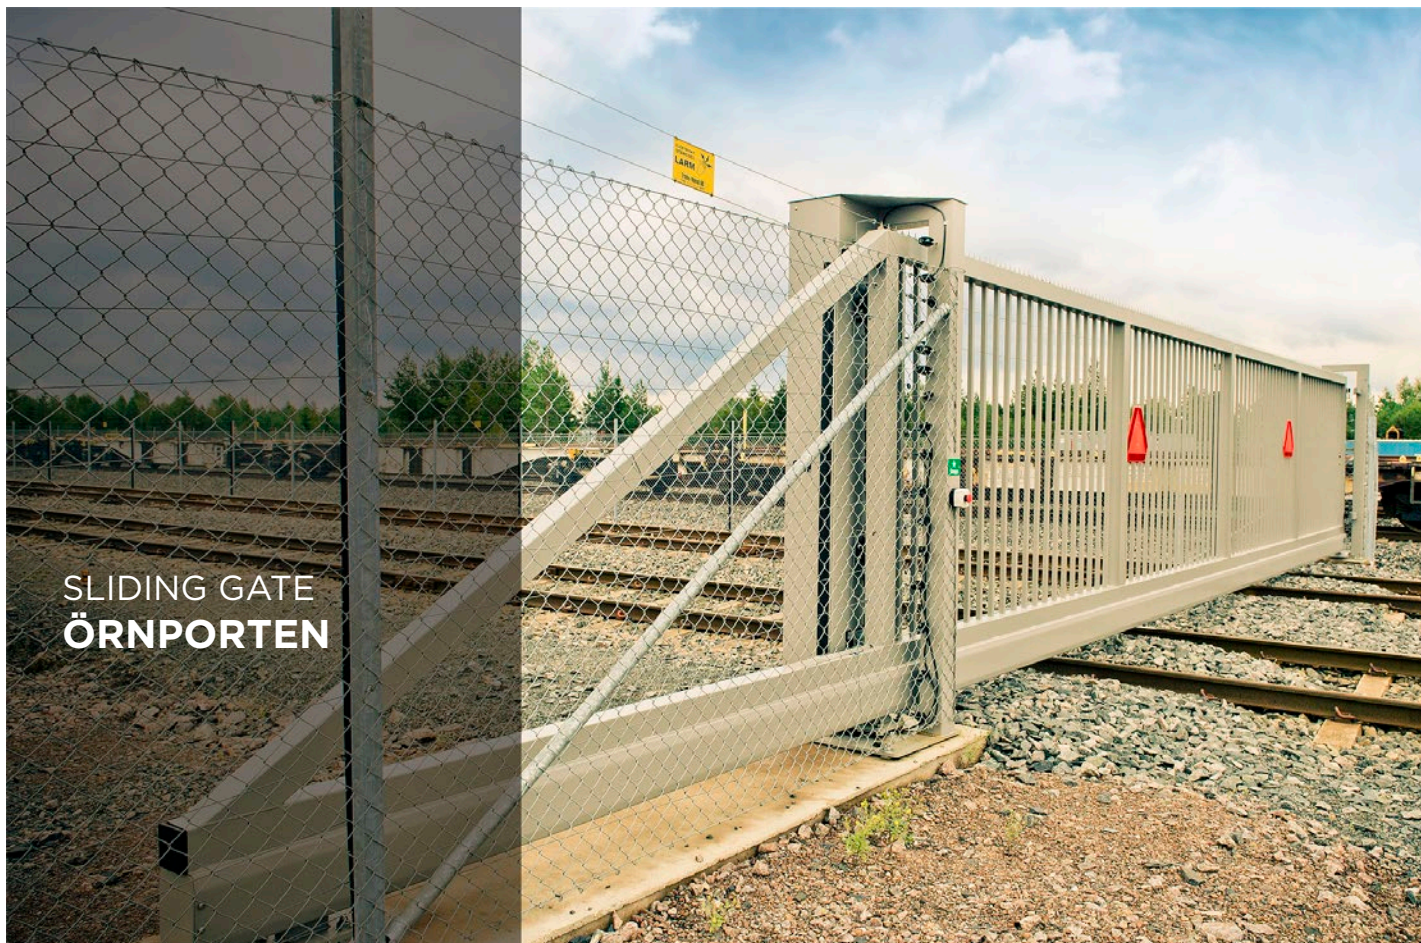

The Örnsporten (Eagle Gate) industrial cantilever sliding gates are the strongest in the product range, securely controlling openings that are up to 18 m wide as a single leaf gate or up to 36 m wide as a double leaf gate. The gate employs the same market leading technology that makes the Demex cantilever sliding gates Scandinavia's best sliding gates according to our customers.

Problem-free operation

- Available both manually operated and automatically operated
- Designed and manufactured to open and close easily thanks to the EASYROLL wheel system.

Strong structure and aesthetically pleasing appearance

- Steel frame structure of 120x120 square sections with 25x25 square sections as standard filling
- Fillings of Viking Guard or Viking Basic panels available to match the fencing system that is used
- The sliding gates can be manufactured with tailored filling that matches the customer's choice
- All sliding gates are GALV FE hot-dip galvanised by default
- The sliding gates can be Z-LACK powder-coated in standard colours such as Olive Green (RAL 6005), Dark Green (RAL 6009), and Black (RAL 9005)
- The sliding gates can be Z-LACK powder-coated in all other RAL colours.

EASY Access

- Sign an EASY support agreement to ensure fail-free operation in the years to come.
- Sliding gates can be opened or closed by any method whatsoever – using a mobile, remote control, key switch, code lock, or any other operating system.



PRODUCT ADVANTAGES

"Unique and easy to install. Available in manual, prepared for the automatic, and automatic version. Meets the insurance requirements".



Easyroll wheel system

DEMEX SKYDDSKLASS 3 





SWING GATE UGGLAN

The Ugglan (Owl) sliding gates are a low-cost alternative to the more expensive cantilever sliding gates, securely controlling openings that are up to 12 m wide as a single leaf gate or up to 24 m wide as a double leaf gate. The Ugglan sliding gate is a manual sliding gate operated by a Henderson rail and a nose wheel at the front edge of the gate.

Problem-free operation

- Available only manually operated
- Designed and manufactured to open and close easily thanks to the EASYROLL wheel system.

Strong structure and aesthetically pleasing appearance

- Steel frame structure of 60x60 square sections with 20x20 square sections as standard filling
- The sliding gates can be manufactured with tailored filling that matches the customer's choice
- All sliding gates are GALV FE hot-dip galvanised by default
- The sliding gates can be Z-LACK powder-coated in standard colours such as Olive Green (RAL 6005), Dark Green (RAL 6009), and Black (RAL 9005)
- The sliding gates can be Z-LACK powder-coated in all other RAL colours.



Single or double wheel

DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

"Manual, economic sliding gate with three rows of barbed wire. Choose from any color".





SWING GATE GUSTAVSSON

The Gustavsson House Gates have the same design as our Pettson range, but are designed to be more secure and are complete with a Locinox cylinder lock system.

Broad range

The Gustavsson House Gates are available for a wide range of different openings, by default 0.8 m, 1.0 m, 1.2 m, or 1.5 m high, up to 2 m wide as a single leaf gate, up to 4 m wide as a double leaf gate, as a combination of a 2-m gate and a 1-m gate for a 3-m opening, or as a single 1-m gate. Demex can also produce Gustavsson House Gates to suit your application if it involves larger openings.

Well-thought-out design

Gustavsson House Gates are manufactured with 40x40 square section steel frame, by default with crenellated net filling and with optional section filling, Viking Basic or Viking Guard. The gates are fitted by default with a Locinox lock, Locinox drop bolts and stronger hinges.

Neat appearance

The Gustavsson House Gate range is available Z-LACK powder-coated or GALV-FE hot-dip galvanized to suit your requirements.



Lock


DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

“Strong and long lasting gate with Locinox lock. Available in any color, height and opening width”.



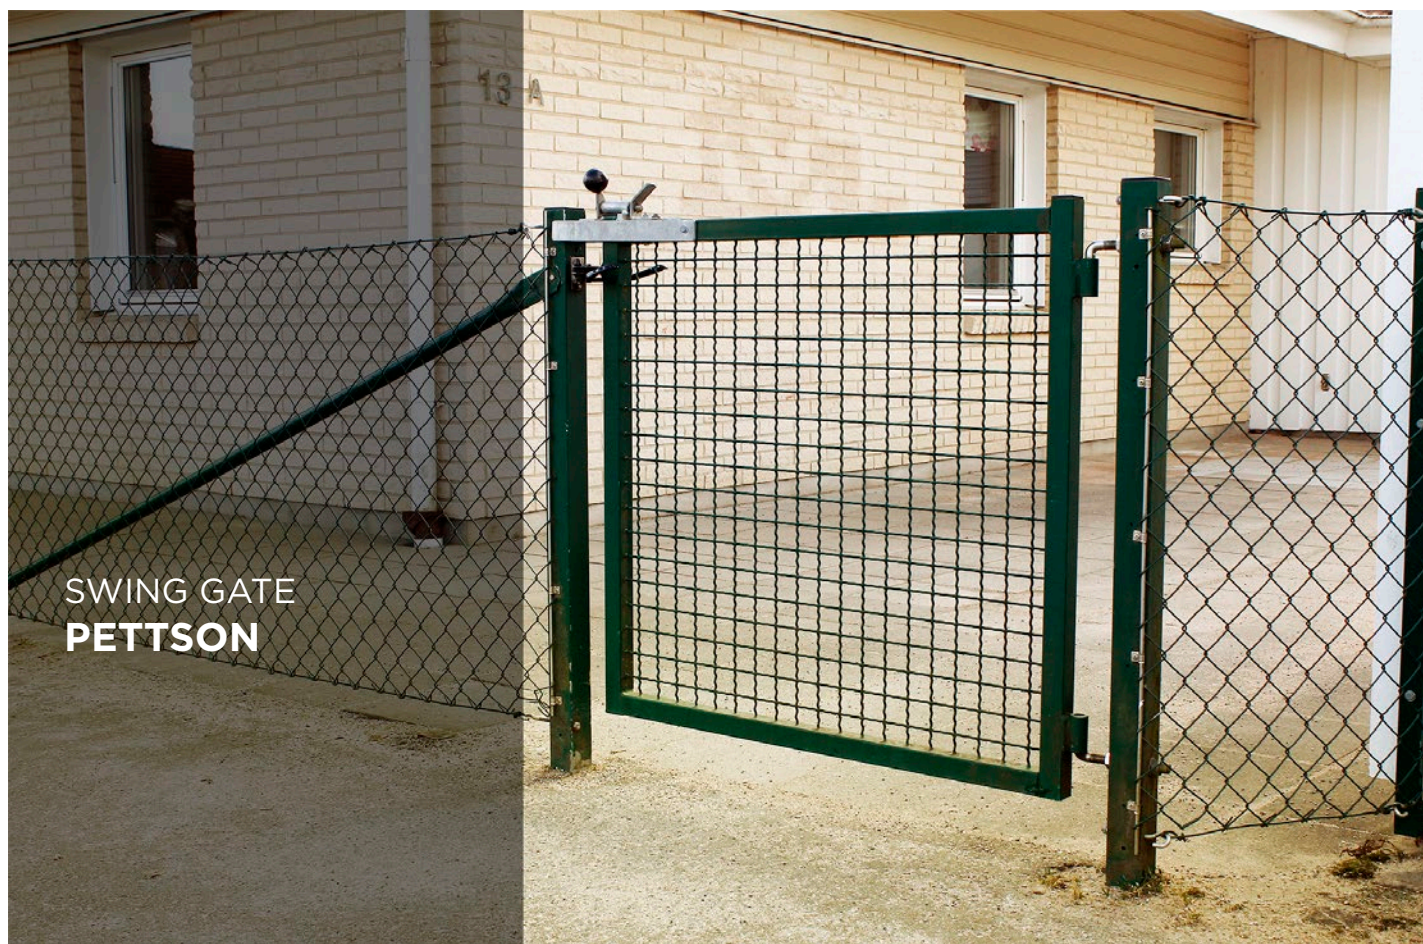

Pettson gate has been carefully designed for homeowners, schools and kindergartens, where it is important that children are kept inside the courtyard.

Broad range

Pettson gates secure a wide range of different openings, by default 0.8 m, 1.0 m, 1.2 m or 1.5 m high, up to 2 m wide as a single leaf gate, up to 4 m wide as a double leaf gate, as a combination of a 2-m gate and a 1-m gate for a 3-m opening or as a single 1-m gate. Demex can also produce Pettson House Gates to suit your application if it involves larger openings.

Well-thought-out design

Pettson gates are manufactured with 40x40 square section steel frame, by default with crenellated net filling and with optional section filling, Viking Basic or Viking Guard. The gates are fitted by default with a lift lock which can be replaced with other more secure locking systems.

Neat appearance

The Pettson House Gate range is available Z-LACK powder-coated or GALV-FE hot-dip galvanised to suit your requirements.



Lock

DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

"Strong and long-lasting gate prepared for any lock. Safe for children. Available in any color, height and opening width".





SWING GATE ROBUST

Robust Industrial Swing Gates are the best-selling swing gates by Demex, with an opening that is up to 6 m wide as a single leaf gate or up to 12 m wide as a double leaf gate. They employ the same market leading technology that makes the Demex swing gates Scandinavia's best swing gates according to our customers.

Problem-free operation

- Available both manually operated and automatically operated.
- Designed and manufactured to open and close easily thanks to the EASY OPEN hinge system.

Strong structure and aesthetically pleasing appearance

- Steel frame structure of 60x60 square sections with 20x20 square sections as standard filling
- Fillings of Viking Guard or Viking Basic panels available to match the fencing system that is used
- The swing gates can be manufactured with tailored filling that matches the customer's choice
- All swing gates are GALV FE hot-dip galvanised by default
- The swing gates can be Z-LACK powder-coated in standard colours such as Olive Green (RAL 6005), Dark Green (RAL 6009), and Black (RAL 9005)
- The swing gates can be Z-LACK powder-coated in all other RAL colours.

Safe by default

- Automatically operated swing gates are equipped by default with crush protection and emergency stop
- Photocell, vehicle detectors, warning lights, and traffic lights can be installed in order.



PRODUCT ADVANTAGES

"Economic gate, can be open 180 or 90 degrees".



Barbed Wire

DEMEX SKYDDSKLASS 2 



BI-FOLDING GATE JET GATE

Jet Gate was invented for people who like things that work fast. Gate opens really quickly, so you don't waste your time for the opening.

Key benefits

- Superfast: operating speed from 300 - 1800 mm/sec
- Can be open, and close many times per hour
- Requires minimum amount of space for gate leaf travel
- Made by approved standard components
- No upper portal - well suited for high vehicles
- No traces in the ground, and locking in the driveway - well suited for heavy-duty vehicles, and shoveling
- Leaves are operated by articulated arms which allows quick opening, closing - even in hard-snow covering area
- Full automatic
- 2 years warranty.


Jet Gate design:

- Swedish design
- Frame structure: 60x60mm
- Profile 25x25mm
- Posts 150x150mm
- Made of sturdy steel and GALV FE galvanized or coated with different colors
- Made with three rows of barbed wire on top to resemble nearby fence and meet insurance requirements or without as required.



PRODUCT ADVANTAGES

"Designed to open super fast many times a day.
Plug'n play product".

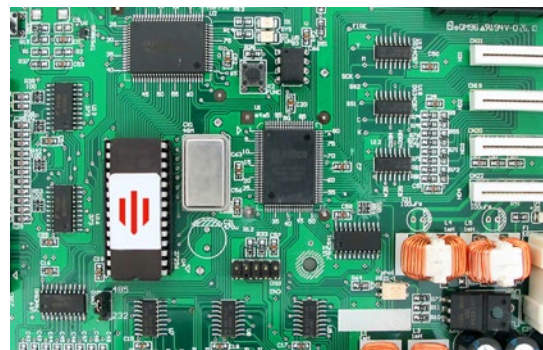

Swedish, fastest automatic

DEMEX SKYDDSKLASS 4 





TURNSTILE HUGGORMEN

Demex can offer turnstiles as a solution for controlling access to your property. There is a wide range of different turnstiles – for pedestrians, for bicycle access or for goods. All turnstiles by Demex are produced with market leading technology appreciated by our customers.

Patented terminal point locking system

The patented terminal point locking system prevents users from being stuck inside the turnstile.

Range of different versions suitable for all applications

The turnstiles by Demex are available for pedestrian access only, or can be combined with an integrated bicycle gate, swing gate for transit of goods, an emergency exit function, or as a security solution subject to high requirements.

Strong problem-free structure

The turnstiles by Demex have been designed and tested to last. The turnstile column and bars can be produced in stainless or galvanized steel, and the mechanism has been tested carefully to function for a countless number of openings.

Easy to use

The turnstiles by Demex are comfortable and easy to use thanks to the speed of rotation that changes to match the person who is on his/her way in.



Automatic or manual

DEMEX SKYDDSKLASS 3



PRODUCT ADVANTAGE

“Powerful and fast. Available in manual and automatic version. Available also with built-in lights.”





VERTIKAL GATE SVANEN

The vertical gate by Demex is a completely unique gate going upwards. When closed, the vertical gate is robust, yet aesthetically pleasing. Because of its surprising and elegant manner of opening, operating this gate remains a unique experience time after time. When open, the vertical gate is slender and striking, in particular, if you have affixed a corporate logo or some other text to it.

Robust yet elegant structure

The vertical gate is a very strong gate: the main beam is made of 80x160x4 mm hot-dip galvanized and powder-coated steel. Sections up to 2 m high are manufactured in 40x20 mm aluminum. Over 2 m they are in hot-dip galvanized and powder-coated steel. All bolts are in stainless steel.

Thanks to the design of the vertical gate, it does not need the space an ordinary gate requires when it is open. The vertical gate can be installed in an existing opening and has no problems coping with sloping terrain.

Soundless safe operation

Thanks to the skilfully designed mechanism and powerful hydraulic motor, the vertical gate functions in all kinds of weather, in rain, wind and snow. As a matter of fact, a 10 m vertical gate works even when wind speeds reach 40 m/s. Safety is guaranteed by infrared photo-electric trip devices that prevent the gate from opening or closing and make it impossible for one to get stuck in the gate.

Rich selection of colours and sizes

Vertical gates are available GALV-FE galvanised or Z-Lack powder-coated.



PRODUCT ADVANTAGES

"Esthetic design and requires minimum amount of space. Company logo visible in the open position."



LOGO



Customized logo

DEMEX SKYDDSKLASS 3 





ROAD BARRIER SPEED+ (0,9sek) 3000

Speed + is a Demex road barrier with an opening width that is 1-3 meters. Opens 0.9 seconds.

“Speed” range of automatic barriers is Demex bestseller. Speed barriers have vertical bars that open and close 90° soft but fast, and safe. Speed barriers work great for both left and right mounting.

The barriers have a lot of advantages:


- Excellence and sustainable quality
- Reliable multi-functional mechanism
- Safe, fast and versatile operation

Speed Barriers are adapted for Nordic climate and are suitable for 1 to 6.5 meter opening width for single barrier and 6,5-13meters for double barrier. Demex manufactures and prepares the barriers as a plug 'n play products. Service is offered on request.



Lacquered or stainless

DEMEX SKYDDSKLASS 1 

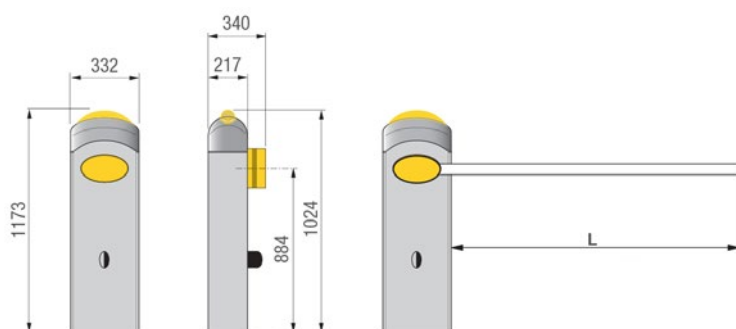

Technical data

Power supply:	230 V AC
Motor Voltage:	24 V AC
Power:	300 W
Max torque	200 Nm
Width:	1 - 3 m
Opening time:	0,9 s
Temperature:	-20° - +55°




ROAD BARRIER SPEED G2000 - G3750

Economic & strong road barrier with an opening width that is 2-4 meters.

“Speed” range of automatic barriers is Demex bestseller. Speed barriers have vertical bars that open and close 90° soft but fast, and safe. Speed barriers work great for both left and right mounting.


- Excellence and sustainable quality
- Reliable multi-functional mechanism
- Safe, fast and versatile operation

Speed Barriers are adapted for Nordic climate and are suitable for 1 to 6.5 meter opening width for single barrier and 6,5-13 meters for double barrier. Demex manufactures and prepares the barriers as a plug 'n play products. Service is offered on request.

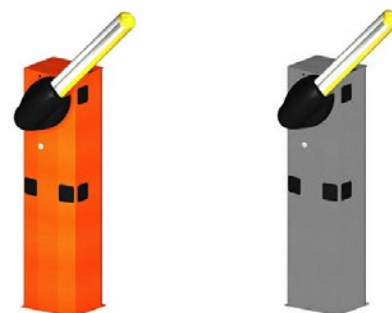

Lacquered or stainless

DEMEX SKYDDSKLASS 1 

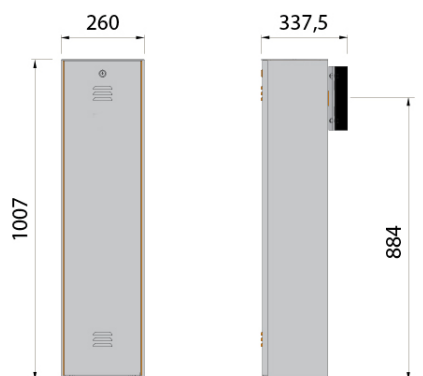

Technical data

Power supply:	230 V AC
Motor Voltage:	24 V AC
Power:	300 W
Max torque	200 Nm
Width:	1 - 4 m
Opening time:	2 - 6 s
Temperature:	-20° - +55°



ROAD BARRIER SPEED G4500 - G6500


Economic & strong road barrier with an opening width that is 4,5-6,5 meters.

“Speed” range of automatic barriers is Demex bestseller. Speed barriers have vertical bars that open and close 90° soft but fast, and safe. Speed barriers work great for both left and right mounting.

The barriers have a lot of advantages:


- Excellence and sustainable quality
- Reliable multi-functional mechanism
- Safe, fast and versatile operation

Speed Barriers are adapted for Nordic climate and are suitable for 1 to 6.5 meter opening width for single barrier and 6,5-13meters for double barrier. Demex manufactures and prepares the barriers as a plug n' play products. Service is offered on request.

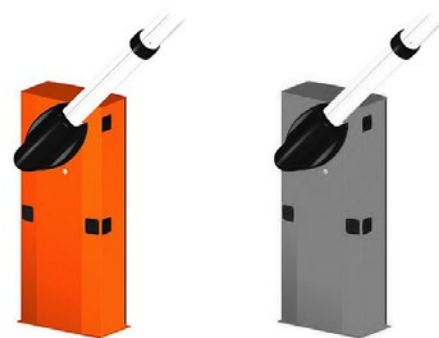

Lacquered or stainless

DEMEX SKYDDSKLASS 1 

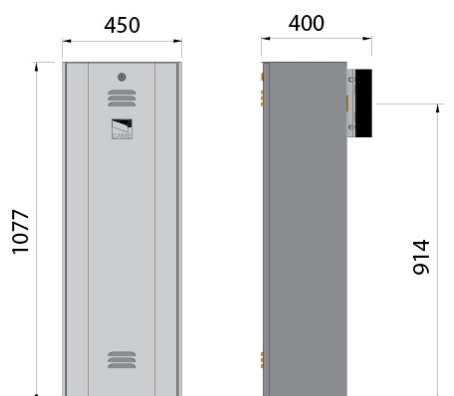

Technical data

Power supply:	230 V AC
Motor Voltage:	24 V AC
Power:	300 W
Max torque	600 Nm
Width:	4,5 - 6,5 m
Oppening time:	4 - 8 s
Temerature:	-20° - +55°



Elegant and affordable road barrier. 1-4 meters opening width.

Force barriers have an elegant design, and works for both left and right mounting.

The barriers have a lot of advantages:


- Reliable multi-functional mechanism
- Versatile and multi-functional electronic solutions
- Brilliant and sustainable quality
- Practical and stylish design

Force barriers are adapted for Nordic climate and are suitable for 1-8 meter opening width for single and 3-16 meters for double barrier. Demex manufactures and prepares the barriers as a plug n' play products. Service is offered on request.



Lacquered or stainless

DEMEX SKYDDSKLASS 1 

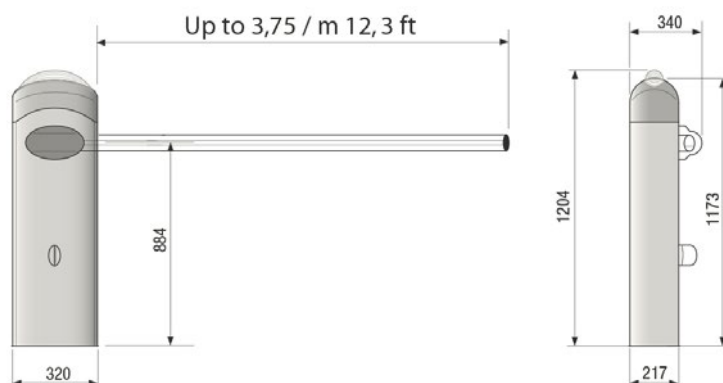

Technical data

Power supply:	230 V AC
Motor Voltage:	24 V AC
Power:	300 W
Max torque	600 Nm
Width:	1-4 m
Opening time:	2 - 6 s
Temperature:	-20° - +55°



ROAD BARRIER FORCE GARD 8

Strong and elegant road barrier. 4-8meters opening width.

Force barriers have an elegant design, and works for both left and right mounting.

The barriers have a lot of advantages:

- Reliable multi-functional mechanism
- Versatile and multi-functional electronic solutions
- Brilliant and sustainable quality
- Practical and stylish design

Force barriers are adapted for Nordic climate and are suitable for 1-8 meter opening width for single and 3-16meters for double barrier. Demex manufactures and prepares the barriers as a plug 'n play products. Service is offered on request.




Lacquered or stainless


DEMEX SKYDDSKLASS 1 

Technical data

Power supply:	230 V AC
Motor Voltage:	24 V AC
Power:	300 W
Max torque	600 Nm
Width:	2 - 8 m
Oppening time:	4 - 8 s
Temerature:	-20° - +55°

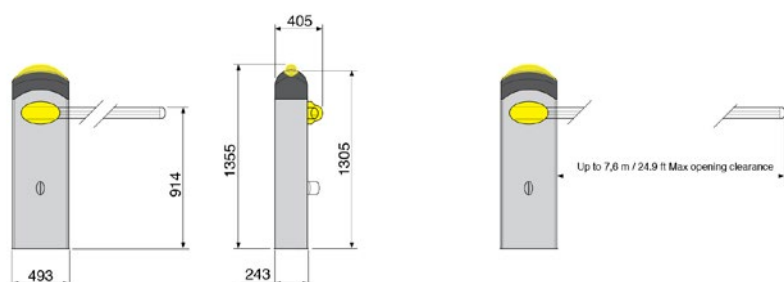

ROAD BARRIER PERFORMANCE GARD 12

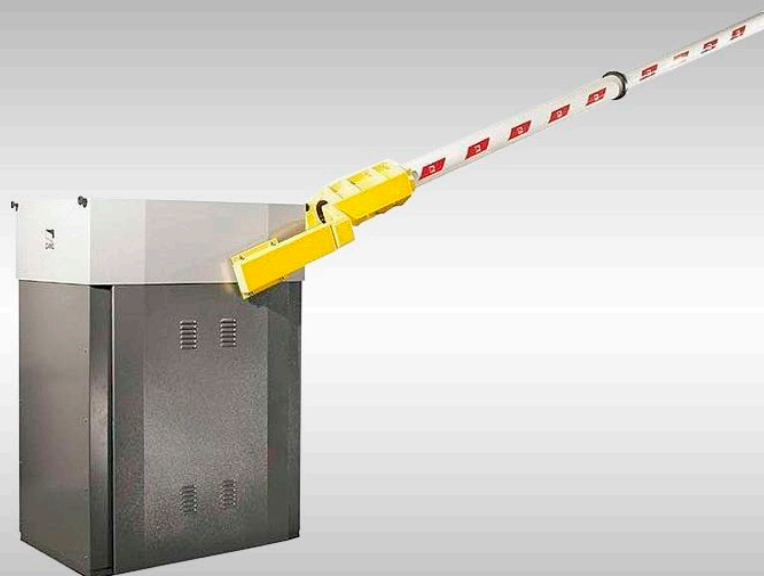

Performance is Demex largest vertical road barrier. Performance is designed to open and close 24 meters in 10 seconds.

The barriers have a lot of advantages:


- Reliable multi-functional mechanism
- Versatile and multi-functional electronic solutions
- Brilliant and sustainable quality
- Practical and stylish design

Force barriers are adapted for Nordic climate and are suitable for 8-12 meter opening width for single and 12-24 meters for double barrier. Demex manufactures and prepares the barriers as a plug 'n play products. Service is offered on request.



Powder-lacquered

DEMEX SKYDDSKLASS 1

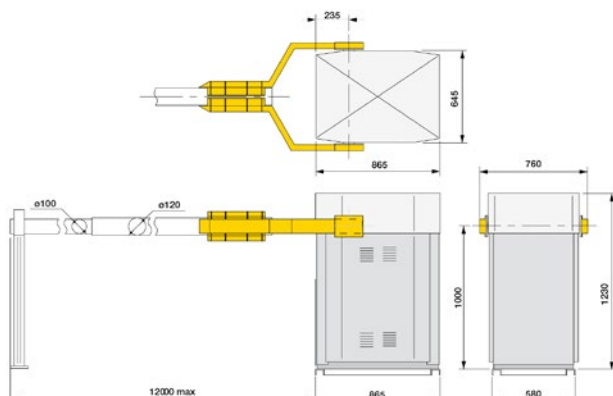

Technical data

Power supply:	230 V AC
Motor Voltage:	24 V AC
Power:	300 W
Max torque	600 Nm
Width:	9-12 m
Oppening time:	10 s
Temerature:	-20° - +55°




Easy car detector
Article nr. ET2000



Easy GSM-module
Article nr. 009725



Mobile support
Article nr. EC1014



Boom joint complete
Article nr. EC1030



Easy remote control 4-channels
Article nr. EC1054



Fast barrier foot
Article nr. EC1013



Reflex
Article nr. EC1015



Easy little light - orange 230V
Article nr. EC1045



Speed+ safety housing
Article nr. EC10301

ROAD BARRIER BOM-IT

Strong, and safe

Bom-it is a manual road barrier that opens like a swing gate; it extends telescopically to a distance of up to 7 metres. It has been developed to quickly and simply block roads and driveways.

Lock

Bom-it road barriers are locked by default with a padlock.


Strong design

Bom-it road barriers are made of a steel structure, with a frame of 60x60 square sections and posts of 60x60 square sections.

Available by default hot-dip galvanised.

Product details:

- Height: 4-7 m, adjustable
- Height: 1.0 m
- Locks: Padlock function.

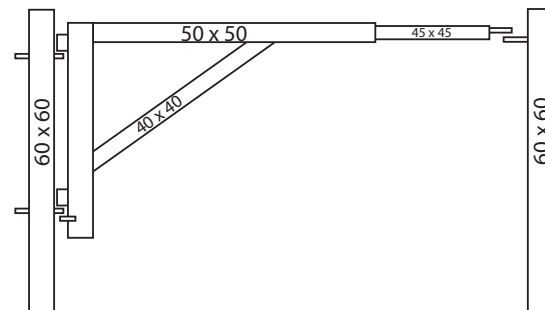

Strong construction

DEMEX SKYDDSKLASS 1 



PRODUCT ADVANTAGES

"Manual - simple and robust. Long-lasting galvanized product".





ROAD BARRIER BOM-MAX

Strong and safe

Bom-max is a strong manual road barrier that opens like a swing door; it extends telescopically up to a distance of 12 m. It has been developed to quickly and simply block roads and driveways.

Lock


Bom-max road barriers are locked by default with a padlock.

Strong construction

Made of a steel structure, with a frame of 90x90 square sections and posts of 150x150 square sections.

Product details:

- Length: up to 12m
- Height: 1.0 m
- Locks: Padlock function fyrkantsprofilen.

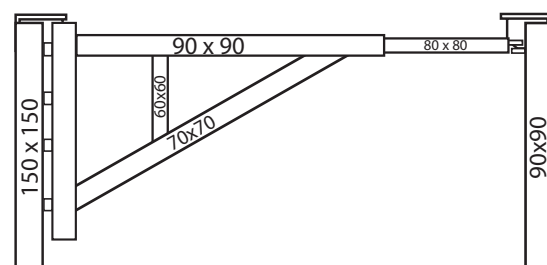

Strong construction

DEMEX SKYDDSKLASS 1



PRODUCT ADVANTAGES

“Manual - simple and robust. Long-lasting galvanized product”.





ROAD BARRIER GIRRAFEN

The Giraff (Giraffen) is a manual road barrier that opens upwards and can close roads and driveways that are up to 9 m wide. The barrier arm is balanced with a counterweight to ensure easy use. It has been developed to quickly and simply block roads and driveways.

By default Z-LACK powder-coated in standard colours such as Olive Green (RAL 6005), Dark Green (RAL 6009), and Black (RAL 9005), but can also be powder-coated in all other RAL colours.

Lock

Giraff road barriers are locked by default with a padlock. Available with key lock or fire lock.

Strong design

The frame is made of a hot-dip galvanised powder-coated steel structure and the barrier arm of a white powder-coated 102 mm aluminium tube. A counterweight balances the barrier arm.

Suitable for cramped and maintenance-free warehouses.



Padlock or key lock

DEMEX SKYDDSKLASS 3 



PRODUCT ADVANTAGES

"Economic, safe and stable barrier".





DEMEX AB

Norra Släthultsvägen 9
333 33 Smålandsstenar
e-mail: info@demex.se
tel: 0371 335 40