



# GATES & FENCING SYSTEMS



DEMEX

SÄTT GRÄNSER

# DEMEX VIKING PANELS



## Viking Basic Panels

- Vertical wire: Ø 5 mm
- Horizontal wire: Ø 6 mm (single)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2510 mm
- Panel height: 630-2430 mm


## Viking Safe Panels

- Vertical wire: Ø 5 mm
- Horizontal wire: Ø 6 mm (double)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2510 mm
- Panel height: 630-2430 mm


## Viking Guard Panels

- Vertical wire: Ø 6 mm
- Horizontal wire: Ø 8 mm (double)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2510 mm
- Panel height: 630-2430 mm


## DIFFERENT FENCING POSTS




**BASIC**



**SAFETY**



**SPEEDFIXING**



**PS SÄK**



Demex panels are available in all colours. The most common of these are:  
Hot-dip galvanized, Dark Green, Olive Green and Black.



## VIKING SMART



The Viking smart fence is an articulated palisade fence.

- Robust (25x25 profiles)
- Easy to install
- Long service life
- Available in several heights & colours
- Suited for installation in uneven terrain






## PORTUGAL GUARD



Portugal Guard is a fencing system that keeps its shape and gives a professional impression. It consists of a panel of vertical and horizontal sections and is available with a straight or pointed top.

- Robust (30x20 mm square sections)
- Easy to install
- Long service life
- Two standard installing methods

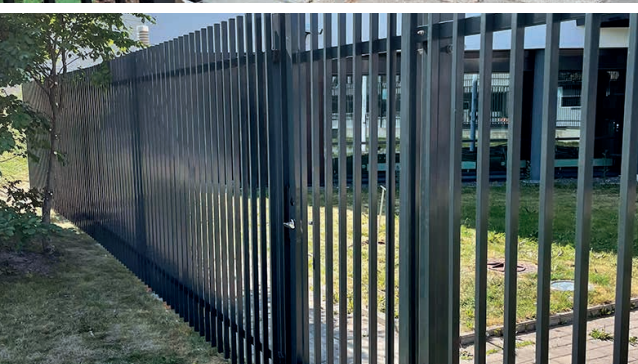

Thanks to adjustable panels Portugal Guard is suited for installation in uneven terrain.



## DE-FENCE CHAIN-LINK



## DE-FENCE

The De-Fence chain-link fence is a common fence in Europe. It is most often used to protect industrial properties, but also features in a number of other applications.

It consists of galvanised or plastic-coated wire mesh fencing net and robust fencing posts of square steel in a number of different heights, from 0.5 m to 5 m.



ANIMAL FENCE & GATE



ANIMAL FENCE WITH A STAPLELOK

## ELECTRIC SECURITY FENCE



### Product benefits:

- **Deterrence** - Most humans have a natural respect for electricity.
- **Delay** - Electric Fences constitutes additional, physical barrier which have to be passed.
- **Detection.** - To force an Electric Security Fence without being detected is difficult. The alarm goes off early - before the intruder enters the premises.







## COBRA TURNSTILES

Demex offers the Cobra turnstiles to control access to your property. There is a wide range of different turnstiles for pedestrians, bicycles or goods.

Power: 210/220 V

Maneuvering: Single or bi-directional rotation

Panic function: Free rotation



Passage width: approx. 600mm

Bicycle passage width: approx. 620mm

Alternative designs: Hot-dip galvanized or powder coated.

### Main Benefits:

- Robust design
- Single or bidirectional rotation
- Galvanised or powder coated
- Passage indicator
- Led lights and ceiling lighting
- 5 years warranty on gate, 2 years on automatic (Warranty does not cover spare parts)

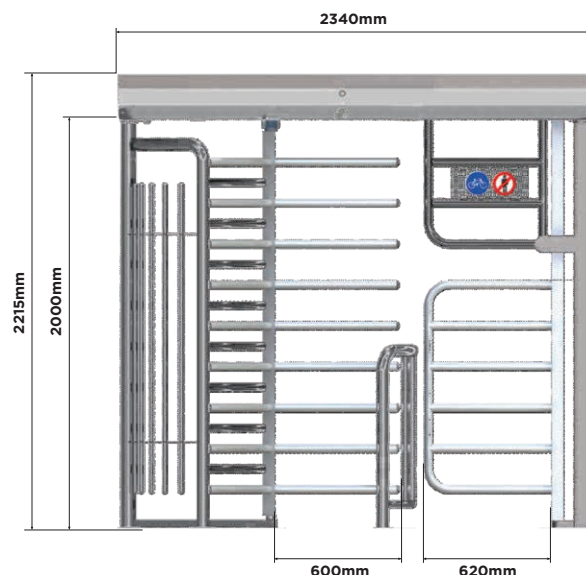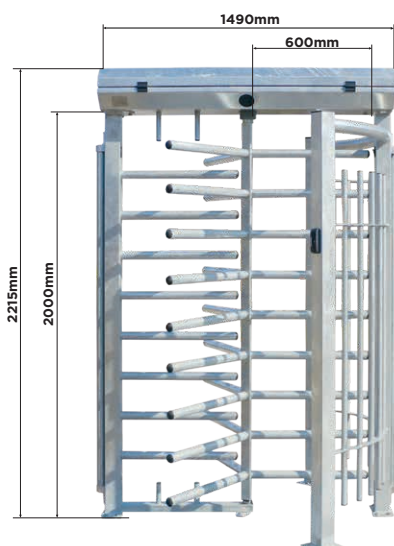





# JET-GATE BI-FOLDING GATE

High-Speed “Jet-Gate” Folding Gate is a perfect solution for industrial areas, logistics centres, sea ports, and airports.

Leaves are operated by articulated arms which allows quick opening, closing - even in hard-snow covering area. Gate opens 100 degrees, which means that the gate and the gate’s arm system are protected from collisions in the open position.

## Main Benefits:

- Operating speed up to 1,2 m/sec
- Can be opened and closed many times every hour
- Requires a minimum of space
- CE and TUV certified
- No upper portal - well adapted for tall vehicles.
- No tracks in the ground
- Fully automatic
- 5 years warranty on gate, 2 years on automatic (Warranty does not cover spare parts)



### SAFETY

Jet-Gate is CE and TUV certified. As a standard features safety edges, photocells and two emergency switches



### PLUG'N'PLAY

Prepared automation system allows fast installation



### HIGH SPEED

Equipped with Demex fastest motors. The automation allows the gate to move up to 1,2m per second



### ROBUST AUTOMATIC

Robust construction allows for the continous operation of the gate





## PRODUCT DESCRIPTION

Jet-Gate is a high-speed and durable bi-folding gate. Opening/closing speed from 1,2 m/sec. Requires minimum amount of space for gate leaf travel. It is available in single and double-leaf versions. Corrosion protected by hop-dip galvanising or powder coating.

### Technical Characteristics:

Frame structure 60x80 mm

Profile 25x25 mm

Posts 180x180 mm

Made of sturdy steel and GALV FE galvanized or coated with different colors

Made with three rows of barbed wire on top to resemble nearby fence and meet insurance requirements or without as required.

### Standard Version

- Motorized
- Cantilever design
- Gate height 2000 mm + 3 rows of barbed wire
- Standard width for double gate 4000-8000 mm.
- The gate can be supplied in single or double gate
- 1pc photocell
- 2st Safety edges
- 2st emergency stop switches

### Different Applications:

#### INDUSTRY



#### PRIVATE / PUBLIC







## SWING GATE ROBUST

Robust Industrial Swing Gates are the best-selling swing gates by Demex, with an opening that is up to 6 m wide as a single leaf gate or up to 12 m wide as a double leaf gate.

They employ the same market leading technology that makes the Demex swing gates Scandinavia's best swing gates according to our customers.

Available both manually and automatically operated.

### Main Benefits:

- Can be opened and closed many times every hour
- CE and TUV certified
- Manual or automatic
- 5 years warranty on gate, 2 years on automatic (Warranty does not cover spare parts)



#### SAFETY

Robust is CE and TUV certified. As a standard features safety edges, photocells and two emergency switches



#### PLUG'N'PLAY

Prepared automation system allows fast installation



#### HIGH SPEED

Equipped with Demex fastest motors.



#### ROBUST AUTOMATIC

Robust construction allows for the continuous operation of the gate





## PRODUCT DESCRIPTION

Gate with an opening of up to 6 m wide as a single-leaf gate or up to 12 m wide as double-leaf gates.

### Technical Characteristics:

Frame construction: 60x60 mm

Profile 20x20 mm

The gate is made of robust steel and is galvanized or painted in any colour.

### Standard Automatic Version:

- 2pcs motors
- 1pc photocell
- 2pcs safety edges
- 2pcs emergency stop buttons with warning signs

### Different Applications:

#### INDUSTRY



#### PRIVATE / PUBLIC







## DEMEX SLIDING GATES

The sliding gate is a perfect solution for industrial areas, logistics centers, seaports and airports. It can safely control openings with a width of up to 18 m for a single-leaf gate or up to 36 m for a two-leaf gate. Available in manual or automatic version.

Designed and manufactured to open and close easily thanks to the EASYROLL wheel system.

### Main Benefits:

- Solid steel structure
- Manual or automatic
- Very high corrosion resistance
- CE certified
- Easy opening thanks to the Easyroll system
- Different fillings possible
- 5 years warranty on gate, 2 years on automatic (Warranty does not cover spare parts)



#### SAFETY

Sliding gates are CE certified. As a standard features safety edges, photocells and two emergency switches



#### PLUG'N'PLAY

Prepared automation system allows fast installation



#### HIGH SPEED

Equipped with Demex fastest motors.



#### ROBUST AUTOMATIC

Robust construction allows for the continuous operation of the gate



## SLIDING GATE SVALAN

The Svalan sliding gates securely controlling openings that are up to 7 m wide as a single leaf gate or up to 14 m wide as a double leaf gate.

### Technical Characteristics:

Steel frame structure: 60x60 mm

Square sections: 25x25 mm

Galvanized or painted in any colour.



## SLIDING GATE HÖKEN

The Höken sliding gates securely controlling openings that are up to 8 m wide as a single leaf gate or up to 16 m wide as a double leaf gate.

### Technical Characteristics:

Steel frame structure: 80x80 mm

Square sections: 25x25 mm

Galvanized or painted in any colour.



## SLIDING GATE ÖRNPORTEN

The Örnporten sliding gates securely controlling openings that are up to 18 m wide as a single leaf gate or up to 36 m wide as a double leaf gate.

### Technical Characteristics:

Steel frame structure: 120x120 mm

Square sections: 25x25 mm

Galvanized or painted in any colour.







# RAIL SLIDING GATE

The sliding gate on rail is the strongest variant in the range, with an opening of up to 12 m wide as a single leaf gate or up to 24m wide as double-leaf gates.

Available both manually and with automatic operation.

## Main Benefits:

- Solid structure
- Manual or automatic
- Very high corrosion resistance
- CE certified
- Different EASY access control methods
- Different fillings possible
- 5 years warranty on gate, 2 years on automatic (Warranty does not cover spare parts)



### SAFETY

Rail Gate is CE certified. As a standard features safety edges, photocells and two emergency switches



### PLUG'N'PLAY

Prepared automation system allows fast installation



### HIGH SPEED


Equipped with Demex fastest motors.



### ROBUST AUTOMATIC

Robust construction allows for the continuous operation of the gate



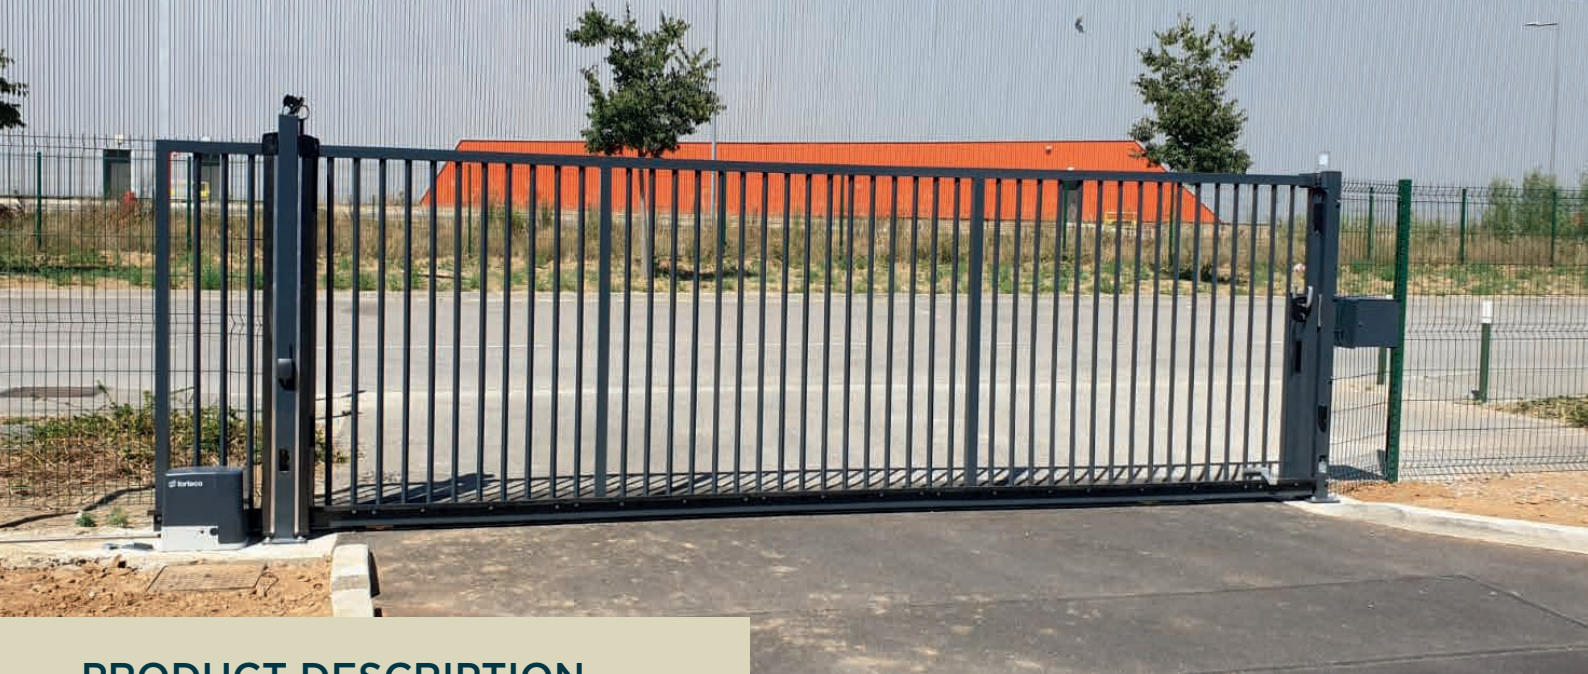

## PRODUCT DESCRIPTION

The sliding gate on rail safely controls openings with a width up to 12 m for a single leaf gate or up to 24 m for a double leaf gate.

### Technical Characteristics:

Barbed 25x25 mm

Posts on tunnel plate

Made of sturdy, hot-dip galvanized steel.

Polyester powder coating in any color

### Manual version

- Locinox lock

### Basic version

- Motorized with all the security accessories
- No control cabinet
- Mechanical limit switch

### Upgraded version


- Motorized with all the security accessories
- With a heated control cabinet
- Mechanical limit switch

## Different Applications:

### INDUSTRY



### PRIVATE / PUBLIC

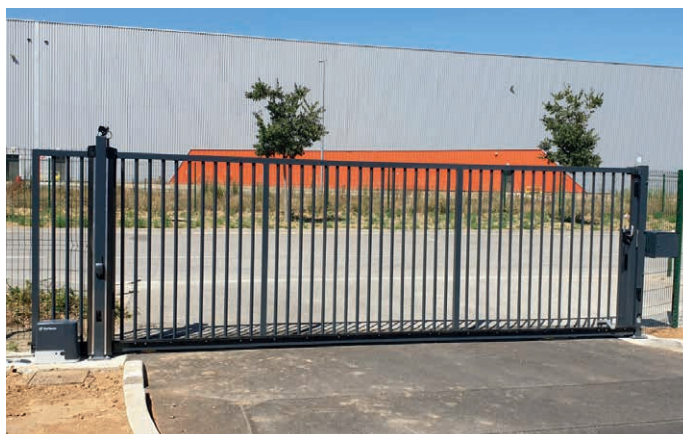



## PEDESTRIAN & SCHOOL GATES



### BAMSE swing gate

Bamse Gates secure a wide range of different openings, by default 0.8 m, 1.0 m, 1.2 m or 1.5 m high, up to 2 m wide as a single leaf gate.



### GUSTAVSSON villa gate

Gustavsson Villa gates are designed as a safer gate, completed with a Locinox cylinder lock system.



### ROBUST pedestrian gate

Robust Industry Pedestrian gates are Demex's best-selling pedestrian gates, a flexible solution for passenger traffic.

## MANUAL & AUTOMATIC ROAD BARRIERS



**Bom Secure** is a manual road barrier that opens like a swing gate; it extends telescopically to a distance of up to 5,5 metres.



**Giraffen** is a manual road barrier that opens upwards and can close roads that are up to 9 m wide. The barrier arm is balanced with a counterweight to ensure easy use. It has been developed to quickly and simply block roads and driveways.

Length: 3000 - 9000 mm  
Boom dimension: Ø 102 mm




### SPEED

An economic barrier with an opening width 2-4m.



### XL SPEED

An economic barrier with an opening width 4,5-6,5m.

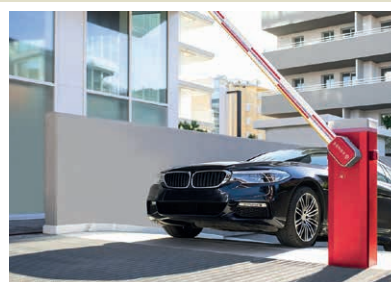

### FORCE GARD 4

En elegant barrier with an opening width 1-4m.



### FORCE GARD 8

En elegant barrier with an opening width 4-8m.



## URBAN BARRIERS



**SMIDIG**  
Height 950mm  
Post 44mm with a ball top




**BÅGRÄCKE**  
1000x1000 48Ø FZV  
1000x2000 48Ø FZV



**SEKTIONSRÄCKE**  
1000x1000 48Ø FZV  
1000x2000 48Ø FZV



**BÅGRÄCKE STRÄCKMETALL**  
1000x1000 48Ø FZV  
1000x2000 48Ø FZV  
1000x3000 48Ø FZV



**SKYDDSRÄCKE**  
1000x1000 48Ø FZV  
1000x2000 48Ø FZV  
1000x3000 48Ø FZV

**CONTACT US TO  
ORDER CUSTOM  
BARRIERS**







SÄTT GRÄNSER

**Demex AB,  
Norra Släthultsvägen 9 - 11,  
333 30 Smålandsstenar  
Sweden  
[www.demex.se](http://www.demex.se)  
tel. +46 371-33 540**