



GATES & FENCING SYSTEMS



DEMEX

SÄTT GRÄNSER

DEMEX VIKING PANELS



Viking Basic Panels

- Vertical wire: Ø 5 mm
- Horizontal wire: Ø 6 mm (single)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2510 mm
- Panel height: 630-2430 mm


Viking Safe Panels

- Vertical wire: Ø 5 mm
- Horizontal wire: Ø 6 mm (double)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2510 mm
- Panel height: 630-2430 mm


Viking Guard Panels

- Vertical wire: Ø 6 mm
- Horizontal wire: Ø 8 mm (double)
- Mesh size: 50/200 or 100/200 mm
- Panel length: 2510 mm
- Panel height: 630-2430 mm


DIFFERENT FENCING POSTS



BETA




SAFETY



SPEEDFIXING



PS SÄK



MASTERFIX



Demex panels are available in all colours. The most common of these are: Hot-dip galvanized, Dark Green, Olive Green and Black.



VIKING SMART

The Viking smart fence is an articulated palisade fence.

- Robust (25x25 profiles)
- Easy to install
- Long service life
- Available in several heights & colours
- Suited for installation in uneven terrain



PORTUGAL GUARD




Portugal Guard is a fencing system that keeps its shape and gives a professional impression. It consists of a panel of vertical and horizontal sections and is available with a straight or pointed top.

- Robust (30x20 mm square sections)
- Easy to install
- Long service life
- Two standard installing methods

Adjustable panels

Panels are also suitable for installation in uneven terrain due to their adjustable panels.

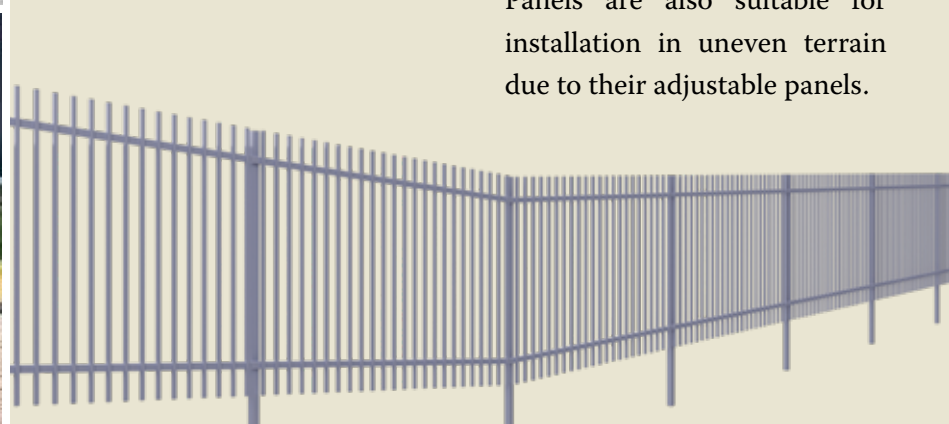



IBERIA GUARD

Standing profiles: 20x20 mm
Horizontal profiles: 50x30 mm
Panel width: 3000 mm
Panel height: 500-2400 mm



SHORELINE GUARD

Standing profiles: Ø 25 mm
Horizontal profiles: 50x30 mm
Panel width: 3000 mm
Panel height: 500-2400 mm



HARBOR GUARD

Standing profiles: 20x20 mm
Horizontal profiles: 50x30 mm
Panel width: 3000 mm
Panel height: 500-2400 mm



COAST GUARD

Standing profiles: Ø 25 mm
Horizontal profiles: 50x30 mm
Panel width: 3000 mm
Panel height: 500-2400 mm



ATLANTIC GUARD

Standing profiles: 15x15 mm
Horizontal profiles: 50x30 mm
Panel width: 3000 mm
Panel height: 500-2400 mm

DE-FENCE

The De-Fence chain-link fence is a common fence in Europe. It is most often used to protect industrial properties, but also features in a number of other applications.

It consists of galvanised or plastic-coated wire mesh fencing net and robust fencing posts of square steel in a number of different heights, from 0.5 m to 5 m.



CHAIN-LINK



ANIMAL FENCE & GATE



ANIMAL FENCE WITH STAPLELOK

ELECTRIC SECURITY FENCE



Product benefits:

- **Deterrence** - Most humans have a natural respect for electricity.
- **Delay** - Electric Fences constitutes additional, physical barrier which have to be passed.
- **Detection** - To force an Electric Security Fence without being detected is difficult. The alarm goes off early - before the intruder enters the premises.



SLIDING GATES



SLIDING GATE SVALAN

The Svalan sliding gates securely controlling openings that are up to 7 m wide as a single leaf gate or up to 14 m wide as a double leaf gate.

Technical Characteristics:

Steel frame structure: 60x60 mm

Square sections: 25x25 mm



SLIDING GATE HÖKEN

The Höken sliding gates securely controlling openings that are up to 8 m wide as a single leaf gate or up to 16 m wide as a double leaf gate.

Technical Characteristics:

Steel frame structure: 80x80 mm

Square sections: 25x25 mm



SLIDING GATE ÖRNPORTEN

The Örnporten sliding gates securely controlling openings that are up to 16 m wide as a single leaf gate or up to 32 m wide as a double leaf gate.

Technical Characteristics:

Steel frame structure: 120x120 mm

Square sections: 25x25 mm



SLIDING GATE UGGLAN

Ugglan Skjutgrind is the most affordable alternative to the more expensive free-standing sliding gates, with an opening of up to 12 m wide as a single-leaf gate or up to 24 m wide as double-leaf gates.

Technical Characteristics:

Steel frame structure: 60x60 mm

Square sections: 20x20 mm



JET-GATE Folding Gate

Jet-Gate is a TÜV-approved gate for an opening width of up to 14 meters. Jet-Gate folding gate is equipped with extremely fast Swedish-developed automation. Jet-Gate opens up to 1 meter per second.

- Operating speed up to 1 m/sec
- Can be opened and closed many times every hour
- Requires a minimum of space
- CE and TUV certified
- No upper portal - well adapted for tall vehicles.
- No tracks in the ground
- Fully automatic
- 5 years warranty on gate, 2 years on automatic (Warranty does not cover spare parts)



ROBUST Swing Gate

Robust, Demex's best-selling swing gate, with an opening of up to 6 m wide as a single-leaf gate.



ROBUST Pedestrian Gate

Robust Industry Pedestrian gates are Demex's best-selling pedestrian gates, a flexible solution for passenger traffic.



BAMSE Villa Gate

Bamse Villa gates are available for a range of different openings, as standard 0.8 m, 1.0 m, 1.2 m or 1.5 m high and up to 2 m wide.



GUSTAVSSON Villa Gate

Gustavsson Villa gates are designed as a safer gate, complete with a Locinox cylinder lock system.



COBRA Turnstile

Bi-directional revolving gate for access to restricted access areas.



COBRA Cycle

Bi-directional revolving gate for access to restricted access areas.

GATE AUTOMATIC



HEAVY I

Power supply: 1-phase 230 V, 10A fuse
Maximum weight: 800 kg
Max width: 20 m
Maximum speed: 11 m / min.



HEAVY II

Power supply: 1-phase 230 V, 10A fuse
Max weight: 1800 kg
Max width: 20 m
Max speed: 12 m/min.



HEAVY III

Power supply: 3-phase 400 V, 10A fuse
Maximum weight: 2200 kg
Max width: 23 m
Max speed: 12 m/min.



HEAVY IV

Power supply: 1-phase 230 V, 10A fuse
Max weight: 1500 kg
Max width: 20 m
Max speed: 12 m/min.



HEAVY V

Power supply: 3-phase 400 V, 10A fuse
Max weight: 3500 kg
Max width: 17 m
Max speed: 11m/min.



STRONG I

Power supply: 1-phase 230 V, 10A fuse
Max weight: 500 kg (gate wing)
Max width: 6 m (single 3 m gate wing)
Speed: 8-12 sec.



STRONG II

Power supply: 1-phase 230 V, 10A fuse
Max weight: 500 kg (gate wing)
Max width: 6 m (single 3 m gate wing)
Speed: 4-8 sec.



STRONG III

Power supply:
Alt 1: with frequency converter,
1-phase 230 V, 10A fuse
Alt 2: no frequency converter,
3-phase 400 V, 10A fuse
Max weight: 900 kg (gate wing)
Max width: up to 14 m (single 7 m
gate wing)
Speed: 8-15 sec.



POWER I

Power supply: 1-phase 230 V, 10A fuse
Max width: 3 m



POWER II

Power supply: 1-phase 230 V, 10A fuse
Max width: 2 m
Speed: 4-8 sec.



DEMEX GATE APP

Controlling gates has never been so easy!

It is possible to monitor and control gates remotely via your mobile, as well as receive an alarm if something happens.

The intelligence lies in the control system itself, which receives information from various sensors and detectors. Based on your unique wishes, we can tailor solutions for your gate.

Huvudfördelar:

- Open the gate with the mobile phone, via app.
- Get online gate status.
- Invite users
- Check reports and statistics.

Download
Demex App



SMOOTH OPENING
FUNCTION
FROM MOBILE PHONES



STATUS
& MONITORING



SCHEDULE



FORCED OPENING/
CLOSING

ROAD BARRIERS



Bom Secure is a manual road barrier that opens like a swing gate; it extends telescopically to a distance of up to 5,5 metres.



Bom-max is a manual road barrier that can be opened up to 12 meters in width.



Bom-it is a manual, simple barrier that can be opened up to 7 meters in width.



Giraffen is a manual road barrier that opens upwards and can close roads that are up to 9 m wide. The barrier arm is balanced with a counterweight to ensure easy use. It has been developed to quickly and simply block roads and driveways.

Length: 3000 - 9000 mm
Boom dimension: Ø 102 mm



SPEED

An economic barrier with an opening width 2-4m.



XL SPEED

An economic barrier with an opening width 4,5-6,5m.



FORCE GARD 4

En elegant barrier with an opening width 1-4m.



FORCE GARD 8

En elegant barrier with an opening width 4-8m.

URBAN BARRIERS



SMIDIG
Height 950mm
Post 44mm with a ball top




BÅGRÄCKE
1000x1000 48Ø FZV
1000x2000 48Ø FZV



SEKTIONSRÄCKE
1000x1000 48Ø FZV
1000x2000 48Ø FZV



BÅGRÄCKE STRÄCKMETALL
1000x1000 48Ø FZV
1000x2000 48Ø FZV
1000x3000 48Ø FZV



SKYDDSRÄCKE
1000x1000 48Ø FZV
1000x2000 48Ø FZV
1000x3000 48Ø FZV

**CONTACT US TO
ORDER CUSTOM
BARRIERS**





SÄTT GRÄNSER

**Demex AB,
Norra Släthultsvägen 9 - 11,
333 30 Smålandsstenar, Sweden
www.demex.se
tel. 0371-33 540**